

### **DESCRIPTION**

ACUCAL Multiviewing Microscopes ACUBL-NX5 is specially designed for life science research and can meet the needs of various microscopic imaging in the laboratory. Stable and compact mechanical structure, ergonomic design & layout, comfortable to use, can operate the microscope in a natural posture.

Using the infinity optical system, it has excellent optical quality such as long working distance and strong chromatic aberration correction ability. It provides reliable imaging, high contrast, clear and bright images, and assists you in cuttingedge life science research. The microscope adopts a modular design and can realize observation methods such as bright field, dark field, differential interference, fluorescence, and polarized light.













Dark Field



**Polarisation** 



Phone: +91-9034125607

Fluorescent

The microscope offers excellent optical performance and ease of use, and is ideal for scientific tasks. It is an ideal tool for experimental teaching, scientific research, and medical inspection. It is the perfect laboratory microscope for life sciences, histology, microbiology etc.



### TECHNICAL SPECIFICATION

### Main Body & Optical System

- UNIVERSAL NIS60 INFINITY OPTICAL SYSTEM can provide high contrast and very flat image with sharp, excellent resolution and high signal-to-noise ratio imaging
- Upright Modular Frame, Highly Rigid, Vibration free Aluminum alloy casting, Anti rust heavy metal stand, Anti-Microbial treated optics, Erogonomics shaped Sturdy Design & Stable.
- Low-hand focus mechanism, low-hand stage and other ergonomic designs to ensure the user can perform microscope operation in the most comfortable situation.
- Conforming to Pathological IS: 4381 latest, Research IS: 5204 latest Indian Standards.
- Contrast Method Bright Field and onsite upgradeable to fluorescence, phase contrast, polarization with teaching head attachment for 2/10/20 persons including main observer, full stepwise motorization like motorized 7-position, DIC nosepiece, motorized 7-position universal condenser with motorized polarizer in/out movement ,motorized 6-position fluorescence turret,motorized stage and DIC (Differential Interference Contrast)

-----

### **Observation Head- Antifungal Coated Prisms**

- Sidentopf Trinocular Head, Inclined at 25°/30°/35°, 3 Level Light Split Switch Beam splitter with sliding E100:P0/E20:P80/E0:P100 (Standard) for video/digital camera. (01 Nos)
- <u>Ergo Tilting Trinocular Head, Inclination 0°~35°</u>, 3 Level Light Split Switch Beam splitter with sliding E100:P0/E20:P80/E0:P100 (**Optional**) for video/digital camera. (01 Nos)
- Sidentopf Ergonomics Binocular Observation Head Inclined at 30°/ 35°, Rotatable 360° (04 Nos)
- Inter-pupillary distance adjustment from 47mm to 78mm.

\_\_\_\_\_

### **Eyepiece**

- 05 Pairs of Compensating High Eyepoint Wide field 10X (paired) F.O.V. Or F.N. 22 or 25 (optional)
- Inbuilt pointer facility (Optional)
- Eyepiece outer mounting barrel diameter or Inner diameter of Eyetube 30mm.
- Anti-fungal & Anti-reflection hard coated conforming to IS: 8275/1976 ( latest)
- Diopter adjustment Facility on Both Eyepieces.
- High Quality & Anti mould eyepieces to get the Image of object well defined over the entire field with good contrast rendition and practically free from spurious color effects.

#### **Nose Piece**

- Low position Inward Facing reverse Sextuple Revolving with Slot for Analyser or DIC Slider, ball bearing type with positive click stops.
- Nosepiece provided with rubber grip for easy rotation mounted on a precision ball bearing mechanism for smooth and accurate alignment.

Middle Module

• Middle module with LED Cursor, two colors red and green, intensity adjustable.



Objectives: NIS-60, N-Plan Infinity Achromatic or Semi Plan Apochromatic or Apochromatic, High Resolution & High Contrast, Anti-fungal & Anti-reflection, Uniformly Centred, Interchangeable & Parfocal.

- $\infty$  4x/0.10, W.D.30mm
- $\infty 10x/0.25$ , W.D.10.2mm
- $\infty$  20x/0.40, W.D.6.4mm, Cover Glass 0.17mm
- $\infty$  40x/0.65, W.D.0.7mm, Spring Loaded ,Cover Glass 0.17mm
- ∞ 100x/1.25(Oil), W.D.0.2mm, Spring Loaded ,Cover Glass 0.17mm
- Objectives have Suitable prominent marking for easy identification: Color coded ring, magnification, NA and nature of objective mentioned
- Provided with Immersion oil.
- $\infty$  2x/0.06, W.D.7.5mm, (Optional)
- Semi apochromat / plan fluor40x (N.A. 0.75,w.d. 0.66mm)spring loaded
- Plan Apochromat ∞ 60x dry/air N.A. 0.9 or higher ,WD 0.2 mm with correction collar(Optional)
- Semi apochromat / plan fluor100x oil(N.A. 1.30,w.d 0.2mm.)Spring loaded

#### Condenser

• Bright field swing out achromat Condenser NA 0.9/1.25 (2X-100X) with focusable with rack & pinion movement having Aspheric Lens.

• Universal 5 Position Turret condenser for Bright field, Phase contrast & Dark Field NA 0.9/1.25 (2X-100X) with focusable with rack & pinion movement having Aspheric Lens. (Optional)

### **Mechanical Stage**

- Hard core anodized surface / Ergo stage ceramic surface Manual right hand, Rackless, wire movement & Scratch less Round edge Double Plate Stage with 2-Slide holder.
- Double Layer Mechanical Stage Full Size 302x202mm, Stage Table Size 185x142mm, Moving Range 76x55mm,
- Right hand control and equipped with Double specimen holder on left side for two slides.
- Wear, scratch resistant & Spill resistant, Coaxial stage with right hand low drive control with rotating mechanism and torque adjustment.

#### **Focusing Control**

- Co axial Graduated Coarse and Fine focusing knob on gear systems for smooth operations.
- The fine focus knobs are held in place magnetically and can be installed on the left or right side as desired.

Phone: +91-9034125607

- Coarse Stroke: 37.7mm, Moving Range 25mm, Fine Division 0.001mm per rotation.
- Torque adjustment for focusing control.



#### Illumination

- Transmit Kohler Illumination, Brightness Adjustable,12V100W Halogen, External Lamp House OR Transmit Kohler Illumination, Brightness Adjustable,14W S-LED, Built-in Main Body (Halogen & LED equally brightened)
- ECO Function Support Auto Power Off After 15 Mins From Operator Leave To Save Energy.
- Brightness control knob.
- "fly-eye" lens/ pre centered illumination design working life 50,000 Hrs.

Electronics: Kohler Universal Input 100-240 V AC, 50/60 Hz.

**Standard Accessories :** Operating & Service Manual, Dust Cover, Guarantee Card and Thermocole Molded packing & outer corrugated box, spare bulb.

**Optional Accessories :** Fluorescence Attachment-Halogen/LED, Polarizer & Analyzer, Dark Field, DIC Observation, Photography, Full Auto Motorized Control.

Phase Contrast Unit & Objectives:

- $\infty$  10x/0.25, W.D.10.2mm PHASE
- $\infty$  20x/0.40, W.D.6.4mm, Spring Loaded , Cover Glass 0.17mm PHASE
- $\infty$  40x/0.65, W.D.0.7mm, Spring Loaded , Cover Glass 0.17mm PHASE


### **FEATURES:**

- All optical parts including objectives, eyepieces and prisms have anti-reflective coating for anti fungal property.
- All metallic parts are corrosion proof, acid proof and strain proof.
- All controls are in a position for comfortable and prolonged use. Precise and ergonomic mechanics.
- Color corrected infinity optical system. (60 mm parfocal length, M25).
- Mounting screws on all objectives to be sized to standards of the Royal Microscopical Society for universal compatibility.
- 6x nosepiece, tilted backwards.
- Outstanding expandability for all common contrasting techniques, as well as fluorescence.

### **UPGRADATION**

## Can be upgraded to a ten-person shared viewing microscope

The multi-person co-viewing microscope system is widely used in college teaching, experimental training and pathological diagnosis. Our Microscope can carry out 1-10 Human expansion, while ensuring that the microscopic image is not distorted and the brightness of the image is not lost. With the teaching head and built-in indicator needle, it is convenient for learning and diagnosis.

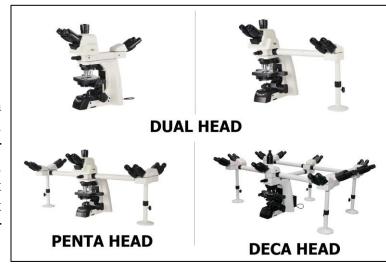

Phone: +91-9034125607



### **PRODUCT FEATURES:**

### Low hand operating handle:

&

#### Low hand focus mechanism

The Platform is ergonomically designed for maximum comfort., and the tension can be adjusted, so that the hand can be placed in a comfortable position and the stage can be moved easily.



### **ECO lighting system**

After the operator leaves for more than 15 minutes, the microscope will automatically turn off the transmitted light source. The energy-saving switch can save energy, protect the light source, and increase the service life of the light source.



### Slicing up/down with one hand

The platform bump guide mechanism is convenient for one-handed up sectioning and one-handed down sectioning, freeing hands during microscopic observation and operation, and improving working speed.



Email: acucalservices@gmail.com (5) Phone: +91-9034125607



ACUCAL SERVICES
901 A/6, Ashok Vihar, Ambala City-134003
Haryana (India)
Website: www.acucalservices.com

